



**RGL**  
Electronics Ltd

**Application** – For use with Intruder, Access, Entry, Fire and CCTV Systems that require a simple switching or timer circuits.

**Part Number: Relay/ Timer modules**

Pelham Works  
Pelham Street  
Wolverhampton  
WV3 0BJ



**Tel:** (01902) 656667

**Web:** [www.rgl.co](http://www.rgl.co)  
**Email:** [info@rgl.co](mailto:info@rgl.co)



**Technical Features:**

**Part No -RL01**  
**Low current Mini switching relay**

9 - 20v dc  
Coil 275  $\Omega$   
Current 44mA  
Contact rating 5A @ 250VAC or 30VDC  
2 x Com - N/O- N/C  
LED indication


Size – 30H x 45W x73L (mm)

**Technical Features:**

**Part No -RL03**  
**Timer relay unit**

12v dc  
Coil 400  $\Omega$   
Current 30mA  
Timer 1 to 60 seconds  
Contact rating 5A @ 250VAC or 10A @24VDC  
1 x Com - N/O- N/C  
LED indication

Size – 20H x 39W x70L (mm)

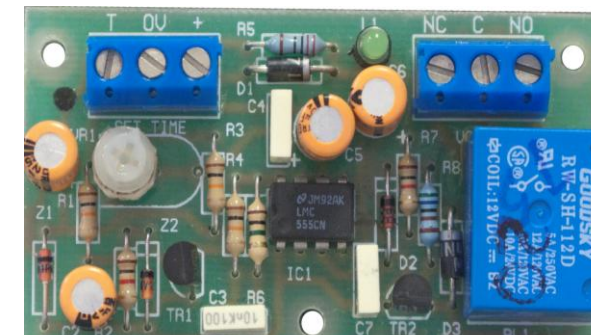

**Technical Features:**

**Part No -RL02**  
**Multi-purpose relay**

6 -40v dc or 6 – 30vac  
Coil 90  $\Omega$   
Current 47mA  
Contact rating 5A @ 250VAC or 30VDC  
2 x Com - N/O- N/C  
LED indication


Size – 30H x 45W x73L (mm)

**Technical Features:**

**Part No - FRM100**  
**Fire switching relay**

12/24v dc  
Coil 400  $\Omega$   
Current 30mA  
Contact rating 5A @ 250VAC or 10A @24VDC  
1 x Com - N/O- N/C  
LED indication

Size – 20H x 39W x70L (mm)

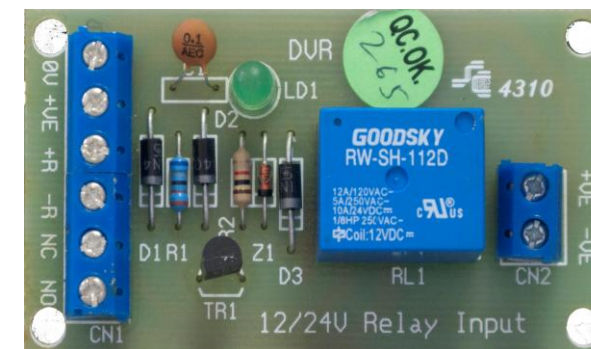

**Products to Trust – Power to help**